



PCE NIGERIA LIMITED



LANTIC

2026




PCE NIGERIA LTD

Profile

Time

2026

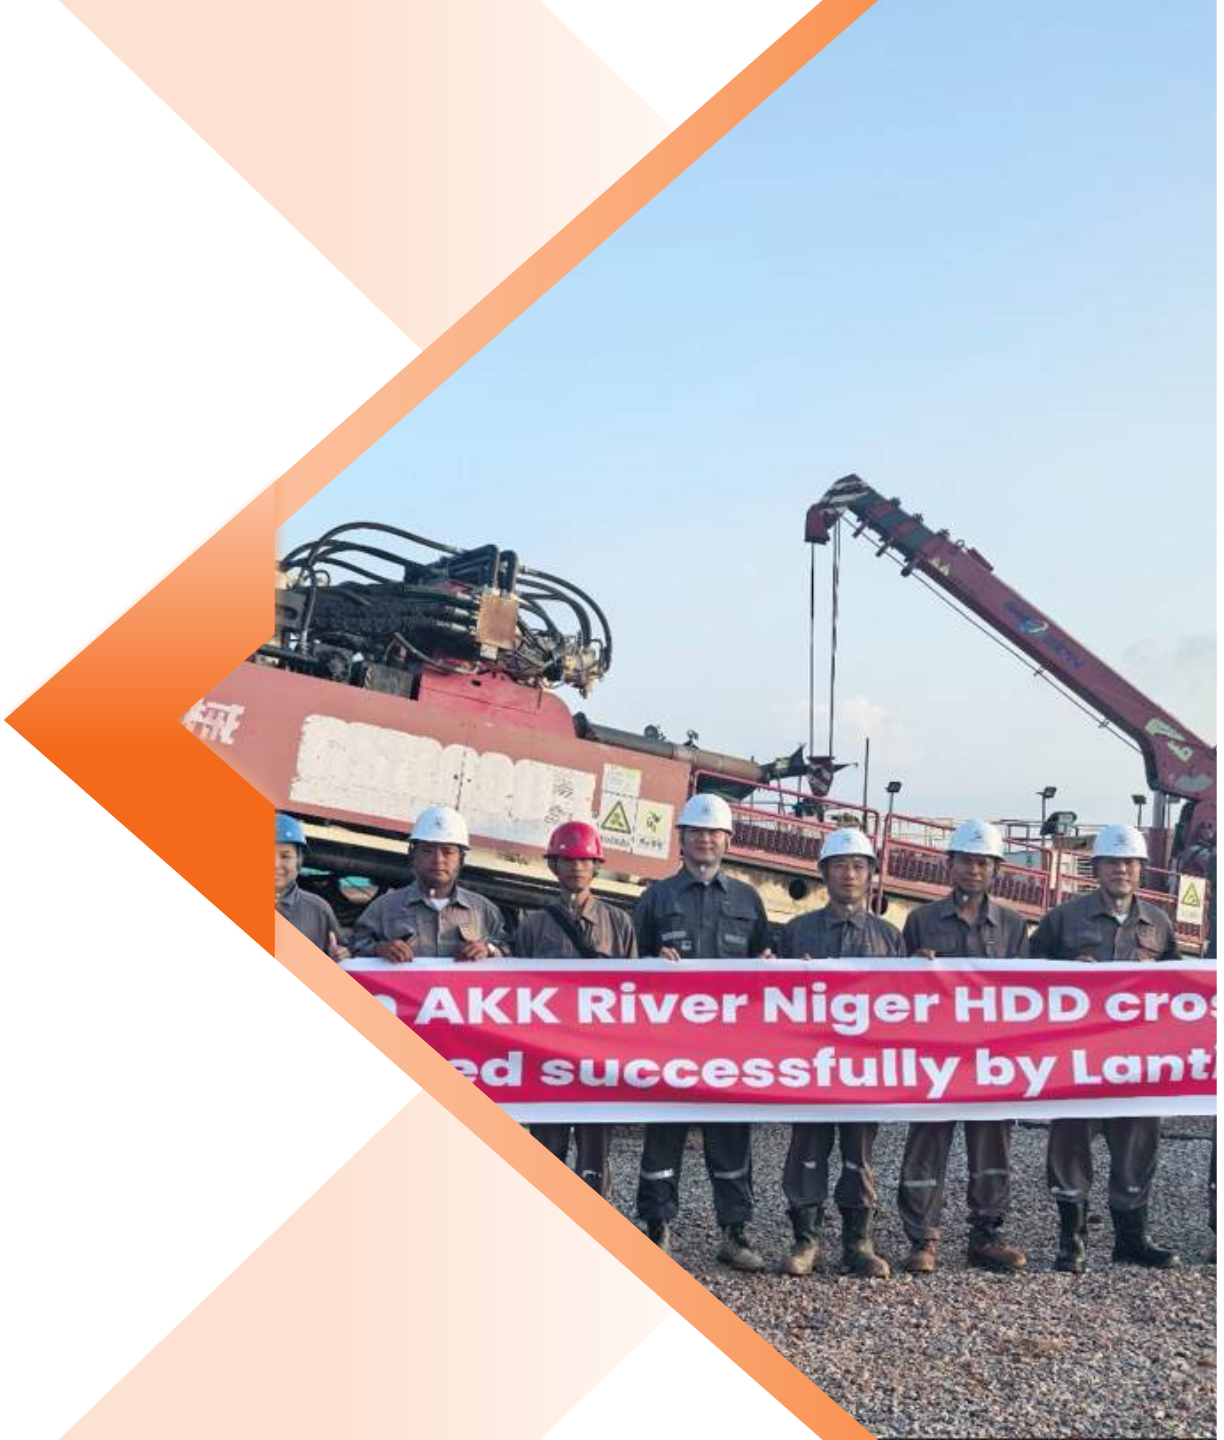



CONTENTS


01 Company Overview

02 Core Business

03 Construction Work
Experience

04 Innovation and
Technology

05 Future Outlook





PCE NIGERIA LIMITED

PART 01

Company Overview





Background



History

PCE Nigeria (consortium with LANTIC) is a premier provider of integrated pipeline construction and EPC services, especially professional at HDD (Horizontal Directional Drilling) work. With a commitment to safety, quality, and innovation, we execute complex projects from conception to commissioning—on time and within budget.



PCE NIGERIA LIMITED



LANTIC



Vision and Mission

To be a globally recognized leader in HDD territory and EPC services, known for engineering excellence, safety, and sustainable practices.

To deliver superior engineering and construction solutions while exceeding client expectations through innovation, efficiency, and integrity.

To also uphold the highest standards of safety, environmental care, and social responsibility.



Company Instruction

NMDPRA

NIGERIAN MIDSTREAM AND DOWNSTREAM PETROLEUM REGULATORY AUTHORITY (NMDPRA)
FEDERAL REPUBLIC OF NIGERIA
MIDSTREAM AND DOWNSTREAM OIL & GAS INDUSTRY SERVICE PERMIT
SPECIALIZED CATEGORY

PERMIT NO: NMDPRA/NDGOSP/21/09/754/N/2023

This Permit is granted to: **LANTIC INDUSTRY LIMITED**
(Name of Permit holder)

of: **21, ADEE STREET WUSE 2, ABUJA, NIGERIA**
(Address of Permit holder)

to render service to the Oil and Gas industry in the category listed hereunder:

HEAVY EQUIPMENT HIRE & LEASING ONLY
- Lifting Equipment, Cranes, Shackles, slings, chain
- Earth moving vehicles, Caterpillars, Payloaders, etc

This permit is issued subject to the conditions prescribed in the Petroleum Industry Act, 2021 and the regulations made thereunder, now in force or which may come into force during the validity period of the permit and does not confer on the Permit Holder the right to sell or distribute petroleum product.

This permit shall expire on: **Wednesday, November 11, 2026**
Fee: **250,000.00**
Dated: **11th** Day of **November 2025**

Authority Chief Executive

ISO Certification

Certificate No. LAF/0072276

Federal Republic of Nigeria

NOGICQS/2025/N/20443

NIGERIAN CONTENT DEVELOPMENT AND MONITORING BOARD

NIGERIAN OIL & GAS INDUSTRY COMPANY

Has been registered on the NOGIC QS

**HEAVY EQUIPMENT HIRE AND LEASING COMPANY
MANPOWER DEVELOPMENT, CORROSION**

The Board reserves the right to revoke this Certificate
Or where the Board

Certificate of Registration

**HERZOG ASSOCIATES LTD
TECHNICAL TRAINING & CERTIFICATION SCHEME**
Code: HC.0/2425

CATAGLYPHIS LOGISTICS LTD.
Civil, Survey, Marine & Off-Shore Logistics

Having fulfilled the Safety, Operating and Technical requirements of the program, we do hereby

Certify

LANTIC INDUSTRY LIMITED

conforms to the Health & Safety Management Standard in line with the Oil and Gas and related Industry requirements.

Given under our hand this date: **10/10/2025**
Expiry Date: **09/10/2026**

Director of Training **Plant Superintendent**

Cooperative Main-contractor and Owner



การไฟฟ้านครหลวง
Metropolitan Electricity Authority





PCE NIGERIA LIMITED

PART 02

Core Business





Scope of Service

01

Horizontal Directional Drilling (HDD) Engineering and Construction

- Site Visits & Assessment
- Geological Prospecting
- Surveying & Mapping & Engineering
- Onshore/Offshore HDD Crossing
- Pipeline fabrication (Welding/NDT/hydro-test/Coating)



02

EPC for Pipeline Construction

- PCE is dedicated to providing professional EPC (engineering/ procurement/ construction) solutions on pipeline projects.
- The main work includes various construction technologies for pipeline construction, including OPC/ HDD/ BORED as well as Welding/ NDT/ Hydro-test/ Coating/Pre-commissioning...





Scope of Service

03 Pipeline Location Survey (BPDS technique)

Buried Pipeline Detection System (BPDS):

- **Primary Application:** Accurate localization and depth measurement of deeply buried steel pipelines.
- **Survey Range:** 2 to 100+ meters depth including river/ mountain/ buildings...
- **Survey Accuracy:** lower than $\pm 2\%$ error for horizontal and vertical data
- **High anti-interference:** using Extremely Low Frequency, **2Hz~3Hz**, high anti-interference capability
- **Theoretical Basis:** Electromagnetic theory.



04 One-stop HDD Resource Service

- Supply Main HDD equipment, including HDD Rig/Pump/Recycle...
- Supply HDD Materials, including Bentonite, Special additives.
- Supply Drill tools, including reamers, bits, mud motor.
- Provide technical proposal for HDD crossing.





Manpower

Five Construction Team, Total 150+ people

- HDD Expert: 8 People
- International management: 20+ People
- Technician: 10+ People
- Operation Staff: 24+ People
- Normal Workers: 100+ People





Equipment Resource (In Nigeria)





Equipment Resource (In Nigeria)



Mud system- 4 sets



Mud Pump-6 sets



Excavator-5



Side Boom-2



Mud Tank-16



Bentonite- 2000+ tons



Equipment Resource (In Nigeria)




Reamer



Reamer



Reamer

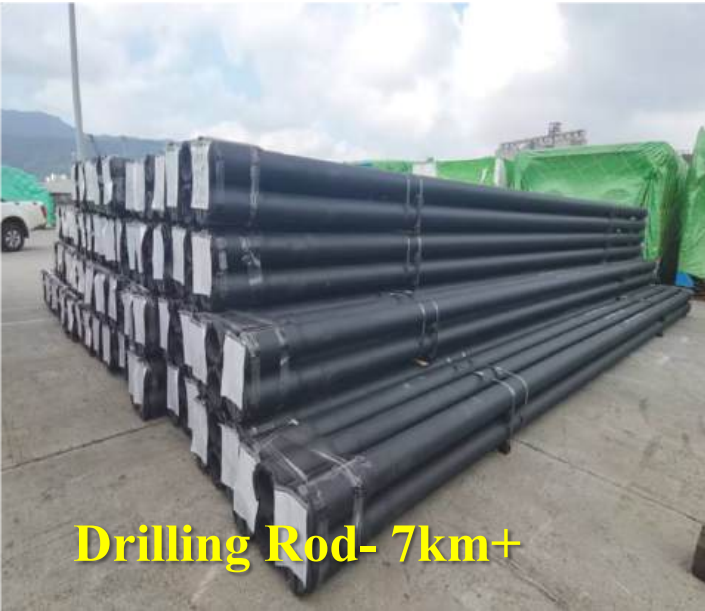

Drilling Rod- 7km+



Roller-100+





Ramming Hammer



Equipment Resource (In Nigeria)

Paratrack 2 System

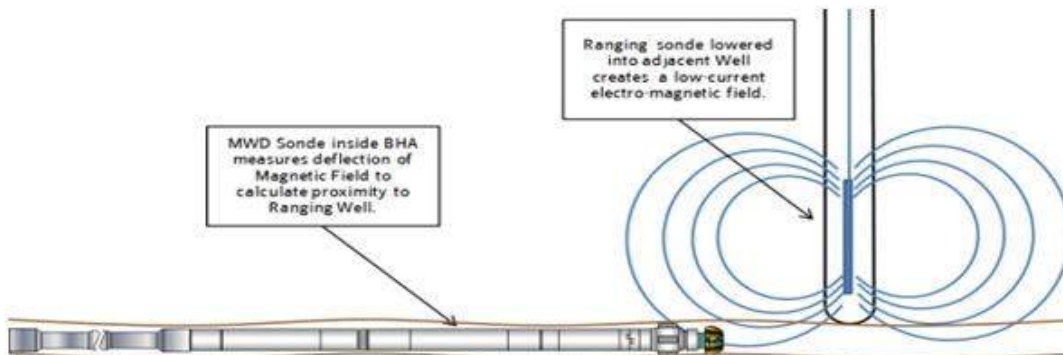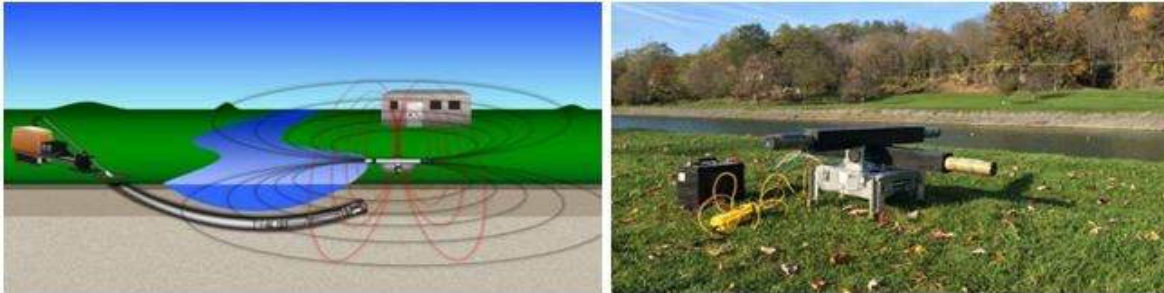


- Three P2 System, can operate interact technique
- Three F5 Walkover System



Equipment Resource

Buried Pipeline Detection System (BPDS)

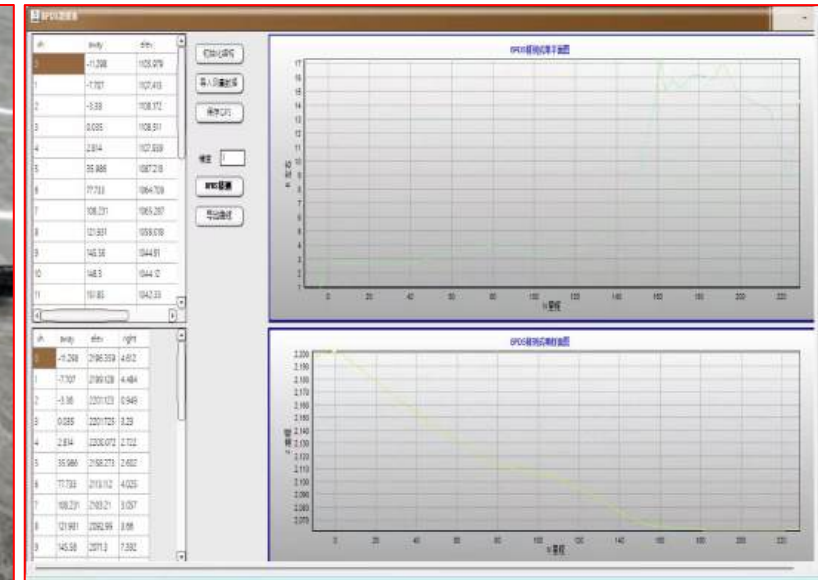

- BPDS technologies for accurately locating pipelines buried deeper than 50+ meters.
- The error can be controlled within $\pm 2\%$ of L (L, the distance from the instrument to the pipeline being measured).



PCE NIGERIA LIMITED


PART 03

Construction Work Experience





Construction Work Experience(

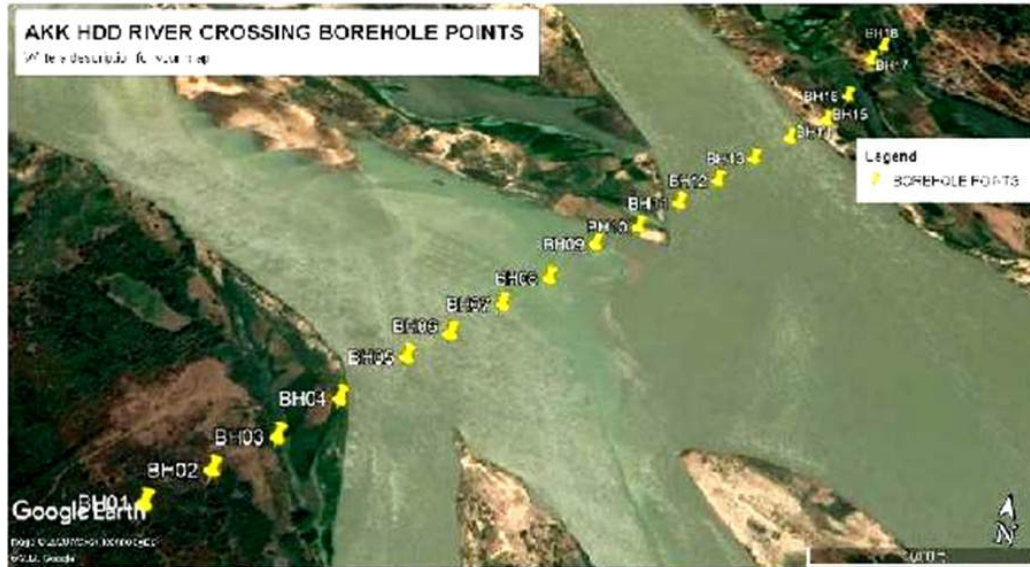



01

AKK Niger River HDD Project- Background Information

- The Nigerian National Petroleum Corporation (NNPC) is developing and implementing the Ajaokuta – Kaduna – Kano (AKK) Section of the Trans Nigeria Gas Pipeline Project.
- **However, the Niger River HDD Crossing** had remained incomplete for many years despite the efforts of several specialized HDD contractors. As a result, **the entire AKK pipeline could not be fully connected**, significantly affecting the commissioning and operation of the project.
- Considering the exceptional technical challenges of the AKK Niger River HDD Crossing and its critical importance to the successful completion of the entire AKK project, the project Owner, NNPC, appointed **PCE** to undertake this works package, recognizing the company's reputation and expertise as a leading international HDD contractor.




Construction Work Experience(

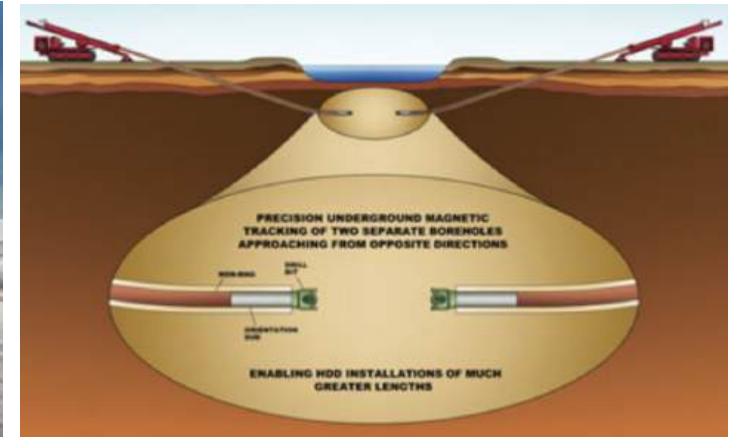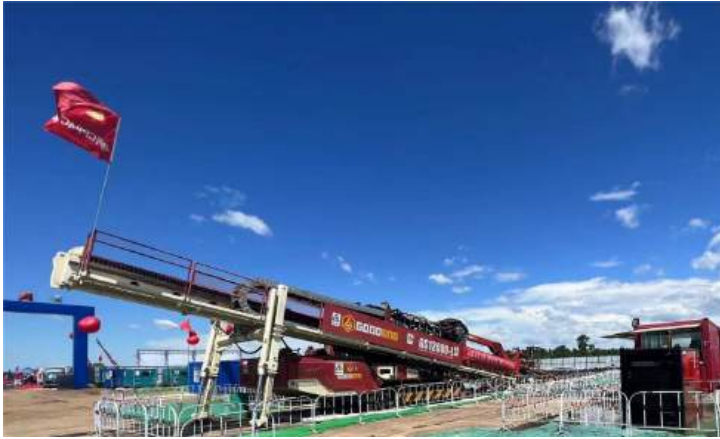


01 AKK Niger River HDD Project- Main technology

- **HDD Crossing Parameters:** 40" x 1.565km HDD, 16 meters depth, crossing Niger River, stratum are very complex including sand, gravel and rock.
- **Special HDD Technique:** *Dual-rig intersecting technology for pilot hole, and Dual-rig synchronous operation for reaming, and Self developed mud formula.*
- **Main HDD Rigs:** 1200-Ton Rig with capability of 1000+ tons pulling force and 350-Ton Rig with capability of 350 tons pulling force.

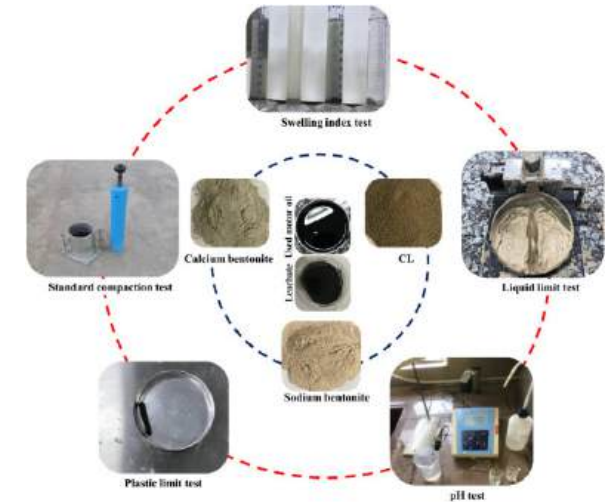



Construction Work Experience(

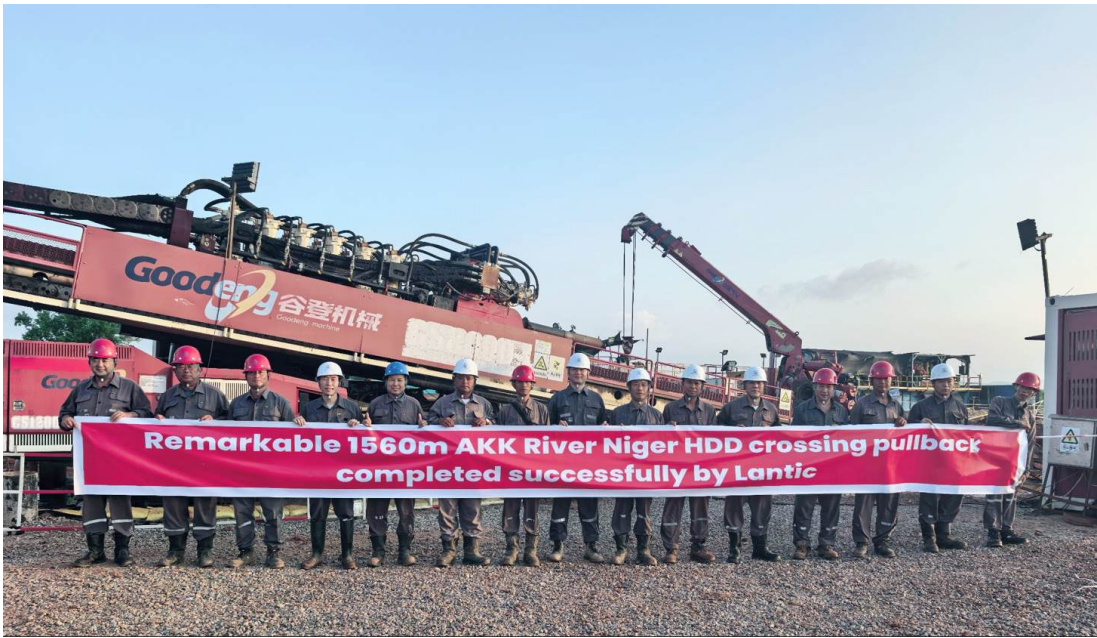

01 AKK Niger River HDD Project- Successfully Completion


We have successfully crossed the 40-inch x 1.6km Ajaokuta-Kaduna-Kano (AKK) Gas Pipeline through the River Niger using the Horizontal Directional Drilling (HDD) special technique, minimizing environmental impact.

Start Time: 25th March, 2025

Completion Date: 26th July, 2025



Construction Work Experience(

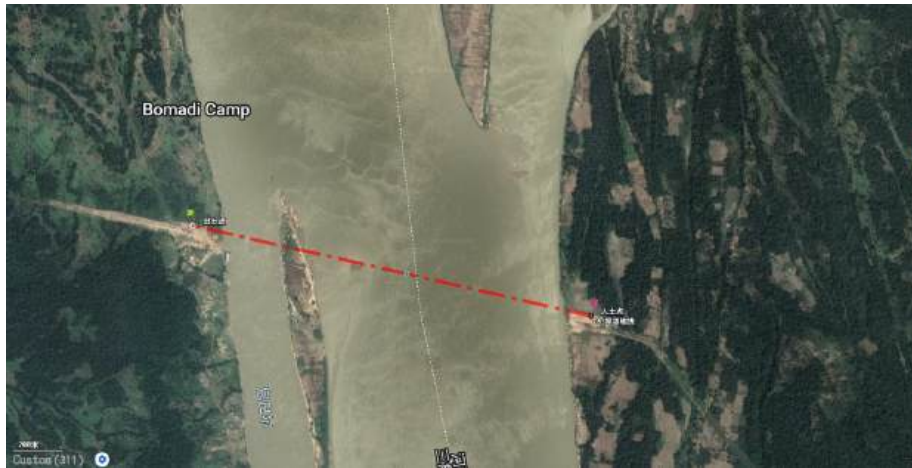

02 OB3 RNC HDD Project- Background Information

- The Nigerian National Petroleum Company Limited (NNPC) through its Subsidiary NNPC Gas Infrastructure Company (NGIC) intends to construct a 48"/36" x 130km trunk gas pipeline from Obiafu/Obrikom (OB/OB) Rivers State to Oben Node at Ijomi in Oghara in Delta State with Gas Treatment and Pressure Reduction Facilities of 2B cf/d capacity.
- **However, the OB3 Niger River HDD Crossing** had remained the critical bottleneck of the **OB3 Project** for many years. Despite repeated attempts by **several specialized HDD contractors, none had successfully completed the crossing.** Consequently, the entire OB3 pipeline could not be fully connected, significantly delaying the project's commissioning and commercial operation.
- Recognizing the exceptional technical challenges of the OB3 Niger River HDD Crossing and its strategic importance to the overall success of the project, as well as PCE's outstanding performance in the successful execution of the AKK Niger River HDD Crossing, the project owner, NGIC, ultimately entrusted PCE with the execution of this critical crossing.



Construction Work Experience(



02 OB3 RNC HDD Project- Main technology

- **HDD Crossing Parameters:** 48" x 2Km HDD, 52 meters depth, crossing Niger River, stratum are very complex including sand, gravel and rock.
- **Special HDD Technique:** *Dual-rig intersecting technology for pilot hole, and Dual-rig synchronous operation for reaming, and Self developed mud formula.*
- **Main HDD Rigs:** GS-12000L Rig with capability of 1000+ tons pulling force and GD-5000L Rig with capability of 500 tons pulling force.





Construction Work Experience



02 OB3 RNC HDD Project- Completion of OB3-RNC HDD Crossing in Nigeria

- Project Name: EPC of River Niger HDD Crossing on OB-3 Gas Pipeline Project
- Crossing Length 2,000 meters, pipe size 48 inches
- Project Location: KP15-KP17, Ndoni (Rivers) - Aboh (Delta)
- Start Date: 06th Oct, 2025 Completion Date: 28th April, 2026

** The largest scale of HDD work in Nigeria*



Construction Work Experience(




03 Typical Project—BSPP2-HDD Project in Thailand

- HDD Brief Information: 1150&1100m /36 inch/ Steel Gas Pipe, clay and sand
- Information: Bangpakong area in Thailand
- HDD Rig: GSC-6000L, The maximum pullback force is 600 tons
- Con. Duration: August 2024 to May 2025
- Owner: PTT , Contractor: SNP



Construction Work Experience()

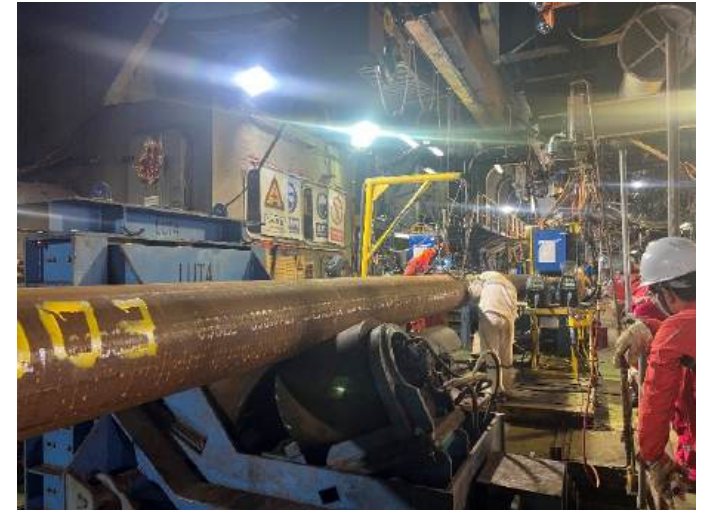

04 Typical Project— ZhanJiang Offshore HDD Project with Welding

- HDD Brief Information: 2100m*5/20inch/ Steel Gas Pipe with pipe welding, clay/sand/rock
- Information: Guangdong area in China, HDD crossing and pipe welding
- HDD Rig: GS-1000L and GS-6000L
- Con. Duration: 2023/10/1 to 2024/4/10
- Owner: CNOOC

** The first 5 offshore HDD parallel crossing in China.*



Construction Work Experience(



05

Typical Project—Raoyang River HDD Project in China

- **HDD Data:** 2293m length /30m depth/ O.D.48 inch/ Steel Gas Pipe, stratum is sand with gravels, crossing Raoyang River in northeast of China.
- **Special HDD Technique:**
 - *Dual-rig intersecting technology for pilot hole*
 - *Dual-rig synchronous operation for reaming*
 - *Big Rig+ Thruster+ Buoyancy Control+ Ramming hammer for pullback*
 - *Self developed mud formula for the whole process*





Construction Work Experience(



05 Typical Project—Raoyang River HDD Project in China

- **Main HDD Rigs:** GS-12000L Rig with capability of 1000+ tons pulling force and GD-6000L Rig with capability of 600 tons pulling force.
- **Con. Duration:** June 2022 to November 2022, total 5 months
- **Owner:** Pipe China / **Main Contractor:** CPP

**The largest scale of HDD work in the world*





Construction Work Experience()



06 Typical Project— Zhan Jiang Sea area HDD Crossing Project

- HDD Brief Information: 4060 m /159mm/508mm/ Steel Pipe/Gravel, sand Stratum
- Project Information: Zhanjiang Guangdong Province, China
- HDD Rig: GD-6000L(Maximum pullback force is 600 tons)
GD-5000L(Maximum pullback force is 500 tons)
- Con. Duration: 2018/12/20- 2109/04/20, 2019/4/25-2019/7/10
- Owner/Main-contractor: CNOOC/SNP

The longest normal soil stratum intersecting HDD Crossing in China



Construction Work Experience



07 Typical Project—Pipeline Work (EPC)

- Project Name: SRB-NBPT LINK LINE PROJECT (NBPT PHASE III)
- Project owner : BAFS pipeline transportation limited (BPT);
- Location : Saraburi Province – Antong Province.
- Job : Ø 12” Oil Pipeline, total 52 kilometers, EPC project.
- Project value : 500,000,000 baht; Work Period: 15th Nov. 2024 to 15th Nov. 2026

Continuous HDD Crossing work (30+km)



PCE NIGERIA LIMITED

PART 04

Innovation and Technology

(BPDS Technique)






Innovation and Technology-**BPDS** Pipeline Location Survey

0 What is **BPDS** Pipeline Location Survey Technique?

- Its core function is to provide precise three-dimensional positioning for ultra-deeply buried pipelines.
- The system works by injecting a magnetic signal of a specific frequency into the pipeline through test posts at both ends.
- A dedicated sensor receives the magnetic field data, which is then processed through our proprietary core algorithms to calculate the pipeline's exact three-dimensional coordinates.
- Developed BPDS technique according to the electromagnetic field theory and dozens of years HDD work experience, and the positioning error can be controlled within $\pm 1\text{-}2\%$ of horizontal and vertical direction.
- The BPDS system demonstrates strong anti-interference capabilities, making it suitable for various complex detection environments and is currently being promoted for application.

- **Very Deep Pipeline Survey, 100 meters+ depth**
- **Very accurate, $\pm 1\%$ -2% error only, significantly ahead of other methods**
- **Strong anti-interference capabilities, applicable to most of the environment.**

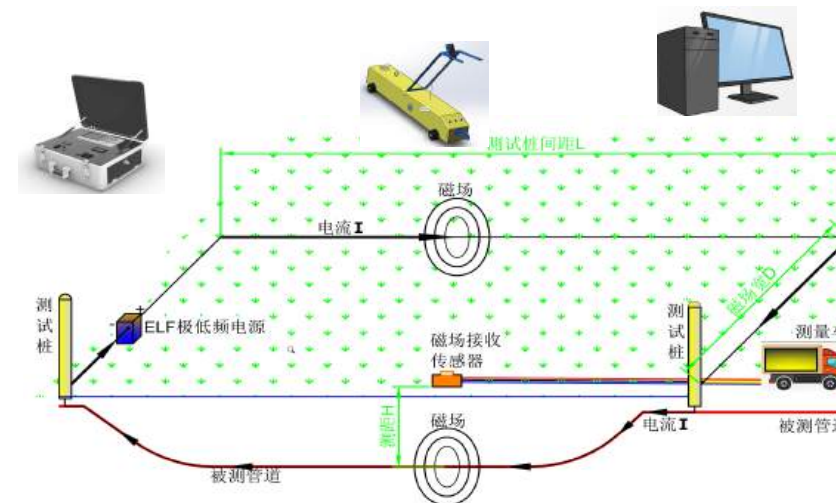




Innovation and Technology-**BPDS** Pipeline Location Survey

01 Typical Pipeline Location Survey Project- **BPDS** Technique

- **Project Time:** May 2023
- **Location:** The tested pipeline crosses Tanghe Reservoir in Shanxi Province.
- **Pipeline Parameters:** Diameter 660mm, made of X60 grade steel, a wall thickness of 7.14mm, a design pressure of 6.4MPa.
- **Workload:** The operational natural gas pipeline is located 15 meters below the riverbed installed by HDD. Survey the location in BPDS technique.
- **Purpose:** A new pipeline is to be constructed, and this new pipeline is very close to the existing natural gas pipeline, approximately 30 meters away in HDD. Provide the accurate existing pipeline data for the new construction.
- **Result:** The existing pipeline location was detected by BPDS technique, and the error is not over than 1 meter. And the new HDD construction was successfully and safely completed using the survey existing pipeline data.

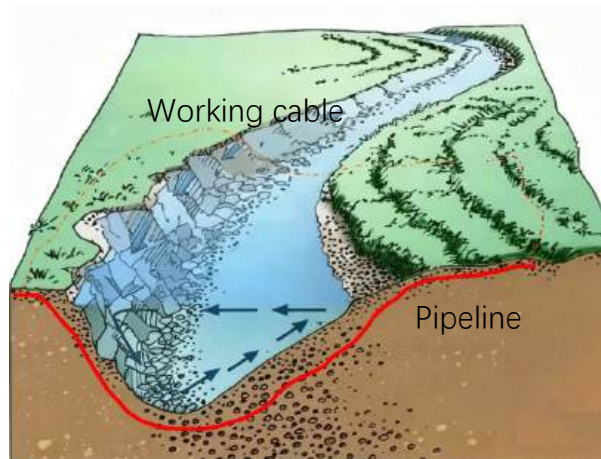



Innovation and Technology-**BPDS** Pipeline Location Survey

02 Typical Pipeline Location Survey Project- **BPDS Technique**

- **Project Time:** June 5th, 2022- November 6th, 2022
- **Location:** Shanghai, China
- **Pipeline Parameters:** steel pipeline, size 12"/16"/20", depth from 15m to 50m.
- **Workload:** Existing Pipeline Location Survey (56 HDD locations)
- **Purpose:** The project owner intends to lay a new product oil pipeline in parallel with an existing pipeline, involving up to 56 horizontal directional drilling crossings. To ensure the safety of the existing pipeline, our company has been commissioned to conduct precise location measurements of the above-mentioned pipeline sections, providing a basis for the planning and design of the new pipeline. The left, right, and depth errors were generally less than 30cm, and the closer they were to the test pile coordinates, the more consistent they became.
- **Result:** within six months, PCE surveyed these 56 HDD pipeline data, and all the new HDD construction were successfully and safely completed using the survey existing pipeline data .





PCE NIGERIA LIMITED

PART 5

Future Outlook






Strategic Goals

01

Expansion Plans

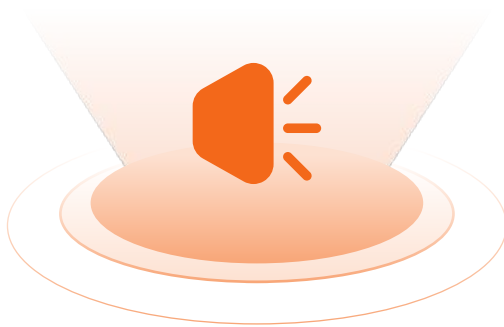

PCE plans to expand its market presence by entering new regions and segments. We aim to increase our product offerings and enhance our global footprint.

02

Sustainability Commitment



We are committed to sustainability. Our future goals include reducing our carbon footprint and developing eco- friendly storage solutions.



PCE NIGERIA LIMITED

2026



Thank you

- Company: [PCE NIGERIA LIMITED](#)
- Head Office Address: [House 45. Nelson Mandela Street Asokoro, Abuja](#)
- Phone: [+234 707 412 6596](#)
- Email: xuliangkui@pcenigeria.com / wanyang@pcenigeria.com
- Website: <http://pcenigeria.com>
- Lagos Address: [HyGroup Place6 Ojulari StreetOff Kusenla RoadIkate, Elegushi, Lekki Lagos](#)
- Port Harcourt Address: [East-West RoadOpp New Onne Link RoadEbubu, ElemeRivers State](#)

